
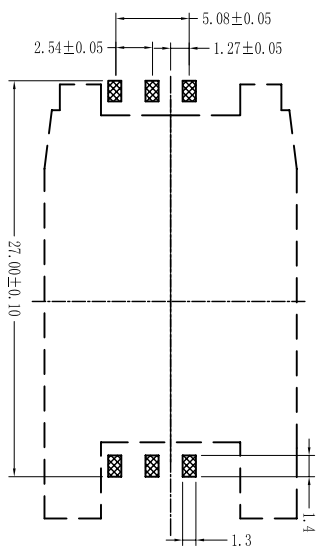
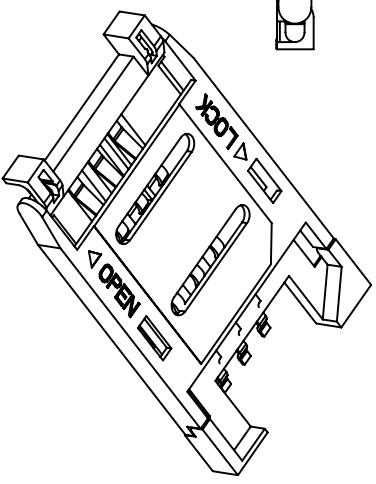
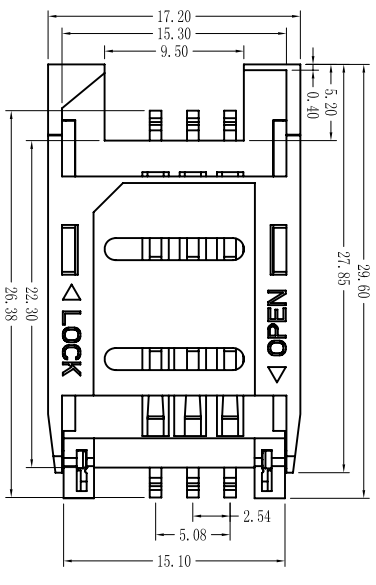


REV	DESCRIPTION	DATE

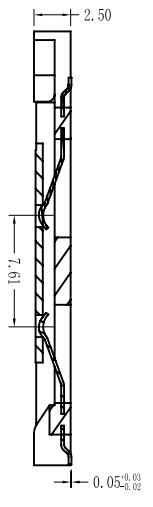

- NOTES:
- 1.0 RATING.
 - 1.1 VOLTAGE: 10 VAC (rms)
 - 1.2 CURRENT: 0.5 AMPERES MAX. PER CONTACT
 - 1.3 OPERATION TEMPERATURE: -25° ~ +90°
 - 2.0 ELECTRIC CHARACTERISTIC:
 - 2.1 CONTACT RESISTANCE: 100m Ω MAX.
 - 2.2 INSULATION RESISTANCE: 1000Ω MIN.
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE
 - 3.0 OPERATION LIFE: 10000 CYCLES
 - 4.0 PLATING OF CONTACT: CONTACT AREA Au 50° Min. TERMINATION AREA Gold Flash. UNDERPLATED NICKEL, 50° ~ 100° Min.
 - 5.0 PACKING: TAPERREEL

RECOMMENDED PCB LAYOUT
TOP VIEW (3X±0.05)

TITLE/品名: SIM CARD H2.50 全塑型
PART NO/料号: A-11-0003

APPROVE/核准	CHECKED/审查	DRAWING/绘图	DRAWING NO/图号	UNIT/单位	REV/版本	SHEET	PROU.	DIM	TOL
MINE CHEN	KING	KING	A-11-0003	mm	A0	1/1	PROU.	X. X	±0.50
8	7	6	5	4	3	2	1	X. XX	±0.38
								X. XXX	±0.20
								X. XXX	±0.10